

MAN SPECIFICATIONS

Model	TGM 15.240 4x2 BL Baseline	TGM 15.240 4x2 BL Standard	TGM 18.240 4x4 BB (Dual Rear)	TGM 18.240 4x4 BB (Single Rear)	TGM 18.280 4x2 BB (L)
Axle layout	4X2	4X2	4X4	4X4	4X2
Control	Forward	Forward	Forward	Forward	Forward
Application	Rigid	Rigid	Rigid	Rigid	Rigid
Mass (Kg)					
Permissible body + payload	9 750	9 750	10 065	9 465	10 925
Tare - total (T) *	4 850	4 850	6 035	6 035	5 575
GVM	15 300	15 300	18 000	17 500	18 000
V	14 600	14 600	16 100	15 500	16 500
GCM	28 000	28 000	28 000	28 000	33 000
D/T	28 000	28 000	28 000	28 000	33 000
Axle - front GA/GAU	6 300	6 300	7 500	7 500	7 500
Axle - front A/AU	6 300	6 300	7 500	7 500	7 500
Axle - rear GA/GAU	10 000	10 000	11 500	10 000	11 500
Axle - rear A/AU	9 000	9 000	9 000	8 000	9 000
Major Dimensions (Mm)					
Overall length	9 900	9 900	8 275	8 275	10 850
Overall width	2 240	2 240	2 422	2 240	2 422
Wheelbase	5 475	5 475	4 500	4 500	6 175
CA - cab to bogie/rear axle	5 110	5 110	4 237	4 237	5 295
Chassis Width Rear	0	0	866	866	864
Engine					
Make	MAN	MAN	MAN	MAN	MAN
Model	D0836 LFL40	D0836 LFL40	D0836 LFL40	D0836 LFL40	D0836 LFL41
Capacity (cm ³)	6 870	6 870	6 870	6 870	6 870
Layout	Diesel inline 6	Diesel inline 6	Diesel inline 6	Diesel inline 6	Diesel inline 6
Type	Turbo intercooled	Turbo intercooled	Turbo intercooled	Turbo intercooled	Turbo intercooled
Power at r/min (kW)	177.0 @ 2,400 - 2,400	177.0 @ 2,400 - 2,400	177.0 @ 2,400 - 2,400	177.0 @ 2,400 - 2,400	206.0 @ 2,400 - 2,400
Torque at r/min (Nm)	925.0 @ 1,200 - 1,800	925.0 @ 1,200 - 1,800	925.0 @ 1,200 - 1,800	925.0 @ 1,200 - 1,800	1,100.0 @ 1,200 - 1,750
Emissions standard	Euro 3	Euro 3	Euro 3	Euro 3	Euro 3
Transmission					
Model	9 S 1310 OD	12 12 OD Tipmatic	9 S 1310 OD	9 S 1310 OD	9 S 1310
Type	Synchromesh	Constant mesh	Synchromesh	Synchromesh	Synchromesh
Shift	Manual or Automatic	Manual or Automatic	Manual	Manual	Manual
No. of gears forward	8	12	8	8	8
First gear ratio	9,48	10,37	9,48	9,48	9,48
Top gear ratio	0,75	0,81	0,75	0,75	0,75
Brakes					
System type	Manual brakematic	Manual brakematic	Manual brakematic	Manual brakematic	Manual brakematic
Front	Discs	Discs	Drums	Drums	Discs
Rear	Discs	Discs	Drums	Drums	Discs
Anti-lock braking system (ABS)	Standard	Standard	Standard	Standard	Standard
Park/emergency system	Spring	Spring			Spring
Exhaust brake	Standard	Standard	Standard	Standard	Standard
Engine brake					
Retarder					
Tyres					
Make - front	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified
Size and ply rating - front	305/70R19.5	305/70R19.5	315/80R22.5	365/80R20	315/80R22.5
Make - rear	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified
Size and ply rating - rear	305/70R19.5	305/70R19.5	315/80R22.5	365/80R20	315/80R22.5
	Steel	Steel	Steel	Steel	Steel





TGM 25.280 6x2 BLL (C) Lifiable T	TGS 33.360 6x4 BB (M)	TGS 33.440 6x4 BB (M)	TGS 33.480 6x4 BB (M)	TGS 41.440 8x4 BB (M)	TGS 41.480 8x4 BB (M)	TGS 33.440 6x6 BB (D26) (SWA)
6X2	6X4	6X4	6X4	8X4 Twin Steer	8X4 Twin Steer	6X6
Forward Rigid	Forward Rigid	Forward Rigid	Forward Rigid	Forward Rigid	Forward Rigid	Forward Rigid
18 690	16 478	16 404	16 404	22 735	22 580	13 070
6 810	9 222	9 296	9 269	10 595	10 420	10 630
25 500	33 000	33 000	33 000	42 000	41 000	29 000
25 500	25 700	25 700	25 700	33 330	33 000	23 700
33 000	65 000	90 000	90 000	90 000	44 000	60 000
33 000	63 600	77 760	84 720	77 760	44 000	60 000
7 500	9 000	9 000	9 000	16 000	15 000	9 000
7 500	7 700	7 700	7 700	15 400	15 000	7 700
22 500	26 000	26 000	26 000	26 000	26 000	20 000
18 000	18 000	18 000	18 000	18 000	18 000	16 000
10 405	9 907	9 890	9 890	9 775	9 775	9 892
2 240	2 490	2 490	2 490	2 472	2 500	2 490
6 450	5 200	5 200	5 200	5 702	5 702	5 200
6 231	4 795	4 795	4 795	6 195	6 195	4 812
0	0	0	0	0	0	0
MAN D0836 LFL41	MAN D2066 LF07	MAN D2676 LF04	MAN D2676 LF03	MAN D2676 LF04	MAN D2676 LF03	MAN D2676 LF04
6 870	10 518	12 416	12 419	12 416	12 419	12 416
Diesel inline 6 Turbo intercooled	Diesel inline 6 Turbo intercooled	Diesel inline 6 Turbo intercooled	Diesel inline 6 Turbo intercooled	Diesel inline 6 Turbo intercooled	Diesel inline 6 Turbo intercooled	Diesel inline 6 Turbo intercooled
206.0 @ 2,400 - 2,400	265.0 @ 1,800 - 1,800	324.0 @ 1,700 - 1,900	353.0 @ 1,700 - 1,900	324.0 @ 1,700 - 1,900	353.0 @ 1,700 - 1,900	324.0 @ 1,700 - 1,900
1,100.0 @ 1,200 - 1,750	1,800.0 @ 1,000 - 1,400	2,100.0 @ 1,000 - 1,400	2,300.0 @ 1,000 - 1,400	2,100.0 @ 1,000 - 1,400	2,300.0 @ 1,000 - 1,400	2,100.0 @ 1,000 - 1,400
Euro 3	Euro 2	Euro 2	Euro 2	Euro 2	Euro 2	Euro 2
12 12 OD AS Tipmatic	12 28 OD TipMatic	12 28 OD TipMatic	12 28 OD TipMatic	12 28 OD TipMatic	12 28 OD TipMatic	12 28 OD TipMatic
Constant mesh Manual or Automatic	Constant mesh Manual or Automatic	Constant mesh Manual or Automatic	Constant mesh Manual or Automatic	Constant mesh Manual or Automatic	Constant mesh Manual or Automatic	Constant mesh Manual or Automatic
12	12	12	12	12	12	12
10,37	12,92	12,92	12,92	12,92	12,92	12,92
0,81	0,77	0,77	0,77	0,77	0,77	0,77
Manual brakematic	Manual brakematic	Manual brakematic	Manual brakematic	Manual brakematic	Manual brakematic	Manual brakematic
Discs	Drums	Drums	Drums	Drums	Drums	Drums
Discs	Drums	Drums	Drums	Drums	Drums	Drums
Standard	Standard	Standard	Standard	Standard	Standard	Standard
Standard	Standard	Standard	Standard	Standard	Standard	Standard
Standard	Standard	Retarder 35	Retarder 35	Retarder 35	Retarder 35	Retarder 35
Not Specified	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified
315/80R22.5	385/65R22.5	385/65R22.5	385/65R22.5	385/65R22.5	385/65R22.5	14R20
Not Specified	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified
315/80R22.5	315/80R22.5	315/80R22.5	315/80R22.5	315/80R22.5	315/80R22.5	14R20
Steel	Steel	Steel	Steel	Steel	Steel	Steel



Photographs are for illustrative purposes only and are not necessarily South African models.

MAN SPECIFICATIONS

Model	TGS 19.360 4x2 BLS (L)	TGS 19.440 BLS (L)	TGS 25.440 6x2 BLS (LX)	TGS 26.440 6x4 BLS (LX)	TGS 26.440 6x4 BLS (LX)	TGS 26.440 6x4 BLS (LX) - EL ACC
Axle layout	4X2	4X2	6X2	6X4	6X4	6X4
Control	Forward	Forward	Forward	Forward	Forward	Forward
Application	Truck Tractor	Truck Tractor	Truck Tractor	Truck Tractor	Truck Tractor	Truck Tractor
Mass (kg)						
Permissible body + payload	9 821	10 215	17 365	17 325	16 833	16 833
Tare - total (T) *	6 679	6 485	8 135	8 375	8 867	8 867
GVM	19 000	19 000	25 700	26 000	26 000	26 000
V	16 500	16 700	25 700	25 700	25 700	25 700
GCM	45 000	45 000	45 000	65 000	65 000	65 000
D/T	45 000	45 000	45 000	65 000	65 000	65 000
Axle - front GA/GAU	7 500	8 000	9 000	9 000	9 000	9 000
Axle - front A/AU	7 500	7 700	7 700	7 700	7 700	7 700
Axle - rear GA/GAU	13 000	13 000	23 000	23 000	23 000	23 000
Axle - rear A/AU	9 000	9 000	18 000	18 000	18 000	18 000
Major Dimensions (mm)						
Overall length	5 875	5 875	6 675	6 775	6 995	6 995
Overall width	2 490	2 500	2 500	2 490	2 500	2 500
Wheelbase	3 600	3 600	3 687	3 875	3 875	3 875
CA - cab to bogie/rear axle	2 795	2 795	2 970	3 070	3 070	3 070
Chassis Width Rear	864	762	762	0	762	762
Engine						
Make	MAN	MAN	MAN	MAN	MAN	MAN
Model	D2066 LF48	D2066 LF50	D2066 LF50	D2676 LF04	D2676 LF04	D2676 LF04
Capacity (cm ³)	10 518	10 518	10 518	12 416	12 416	12 416
Layout	Diesel inline 6	Diesel inline 6	Diesel inline 6	Diesel inline 6	Diesel inline 6	Diesel inline 6
Type	Turbo intercooled	Turbo intercooled	Turbo intercooled	Turbo intercooled	Turbo intercooled	Turbo intercooled
Power at r/min (kW)	265.0 @ 1,800 - 1,800	324.0 @ 1,900 - 1,900	324.0 @ 1,900 - 1,900	324.0 @ 1,700 - 1,900	324.0 @ 1,700 - 1,900	324.0 @ 1,700 - 1,900
Torque at r/min (Nm)	1,800.0 @ 1,000 - 1,400	2,100.0 @ 1,000 - 1,400	2,100.0 @ 1,000 - 1,400	2,100.0 @ 1,000 - 1,400	2,100.0 @ 1,000 - 1,400	2,100.0 @ 1,000 - 1,400
Emissions standard	Euro 3	Euro 3	Euro 3	Euro 2	Euro 2	Euro 2
Transmission						
Model	12 26 DD TipMatic	12 26 DD TipMatic	12 26 DD TipMatic	12 26 DD TipMatic	12 26 DD TipMatic	12 26 DD TipMatic
Type	Constant mesh	Constant mesh	Constant mesh	Constant mesh	Constant mesh	Constant mesh
Shift	Manual or Automatic	Manual or Automatic	Manual or Automatic	Manual or Automatic	Manual or Automatic	Manual or Automatic
No. of gears forward	12	12	12	12	12	12
First gear ratio	16,69	16,69	16,69	16,69	16,69	16,69
Top gear ratio	1	1	1	1	1	1
Brakes						
Front	Discs	Discs	Discs	Discs	Discs	Discs
Rear	Discs	Discs	Discs	Discs	Discs	Discs
Anti-lock braking system (ABS)	Standard	Standard	Standard	Standard	Standard	Standard
Exhaust brake	Standard	Standard	Standard	Standard	Standard	Standard
Engine brake	Standard	Standard	Standard	Standard	Standard	Standard
Retarder		Retarder 35	Retarder 35	Retarder 35	Retarder 35	Retarder 35
Tyres						
Make - front	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified	Michelin
Size and ply rating - front	315/80R22.5	385/65R22.5	385/65R22.5	385/65R22.5	385/65R22.5	385/65R22.5
Make - rear	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified	Michelin
Size and ply rating - rear	315/80R22.5	315/80R22.5	315/80R22.5	315/80R22.5	315/80R22.5	315/80R22.5
Rims	Steel	Steel	Steel	Steel	Aluminium	Aluminium





TGS 26.480 6x4 BLS (LX) - EL ACC 6X4 Forward Truck Tractor	TGS 26.480 6x4 BLS (LX) - EBA 6X4 Forward Truck Tractor	TGS 27.440 6x4 BBS (L) (Steel) 6X4 Forward Truck Tractor	TGS 27.480 6x4 BBS (LX) 6X4 Forward Truck Tractor	TGS 33.360 6x4 BBS (L) 6X4 Forward Truck Tractor	TGS 33.440 6x4 BBS (L) 6X4 Forward Truck Tractor	TGS 33.480 6x4 BBS (L) 6X4 Forward Truck Tractor	TGX 26.540 6x4 BLS (XLX) 6X4 Forward Truck Tractor
16 310	16 310	16 044	16 108	16 107	16 090	16 090	16 735
9 390	9 390	9 656	9 592	9 593	9 610	9 610	8 765
26 000	26 000	27 000	27 000	33 000	33 000	33 000	26 000
25 700	25 700	25 700	25 700	25 700	25 700	25 700	25 700
65 000	65 000	70 000	90 000	65 000	90 000	90 000	65 000
65 000	65 000	70 000	84 720	63 600	77 760	84 720	65 000
9 000	9 000	9 000	9 000	9 000	9 000	9 000	9 000
7 700	7 700	7 700	7 700	7 700	7 700	7 700	7 500
23 000	23 000	26 000	26 000	26 000	26 000	26 000	26 000
18 000	18 000	18 000	18 000	18 000	18 000	18 000	18 000
6 995	6 995	6 775	6 775	6 775	6 775	6 775	6 995
2 500	2 500	2 490	2 490	2 490	2 490	2 490	2 490
3 875	3 875	3 900	3 900	3 900	3 900	3 900	3 875
3 070	3 070	3 095	3 095	3 095	3 095	3 095	3 070
762	762	0	0	0	0	0	762
MAN D2676 LF03 12 419 Diesel inline 6 Turbo intercooled 353.0 @ 1,700 - 1,900 2,300.0 @ 1,000 - 1,400 Euro 2	MAN D2676 LF03 12 419 Diesel inline 6 Turbo intercooled 353.0 @ 1,700 - 1,900 2,300.0 @ 1,000 - 1,400 Euro 2	MAN D2676 LF04 12 416 Diesel inline 6 Turbo intercooled 324.0 @ 1,700 - 1,900 2,100.0 @ 1,000 - 1,400 Euro 2	MAN D2676 LF03 12 419 Diesel inline 6 Turbo intercooled 353.0 @ 1,700 - 1,900 2,300.0 @ 1,000 - 1,400 Euro 2	MAN D2066 LF07 10 518 Diesel inline 6 Turbo intercooled 265.0 @ 1,800 - 1,800 1,800.0 @ 1,000 - 1,400 Euro 2	MAN D2676 LF04 12 416 Diesel inline 6 Turbo intercooled 324.0 @ 1,700 - 1,900 2,100.0 @ 1,000 - 1,400 Euro 2	MAN D2676 LF03 12 419 Diesel inline 6 Turbo intercooled 353.0 @ 1,700 - 1,900 2,300.0 @ 1,000 - 1,400 Euro 2	MAN D2676LF08 12 419 Diesel inline 6 Turbo intercooled 397.0 @ 1,900 - 1,900 2,500.0 @ 1,050 - 1,350 Euro 5
12 26 DD TipMatic Constant mesh Manual or Automatic 12 16,69 1	12 26 DD TipMatic Constant mesh Manual or Automatic 12 16,69 1	12 28 OD TipMatic Constant mesh Manual or Automatic 12 12,92 0,77	12 28 OD TipMatic Constant mesh Manual or Automatic 12 12,92 0,77	12 28 OD TipMatic Constant mesh Manual or Automatic 12 12,92 0,77	12 28 OD TipMatic Constant mesh Manual or Automatic 12 12,92 0,77	12 28 OD TipMatic Constant mesh Manual or Automatic 12 12,92 0,77	12 28 OD TipMatic Constant mesh Automatic 12 12,92 0,77
Discs Discs Standard Standard Standard Retarder 35	Discs Discs Standard Standard Standard Retarder 35	Discs Discs Standard Standard Standard Retarder 35	Discs Discs Standard Standard Standard Retarder 35	Drums Drums Standard Standard Standard Retarder 35	Drums Drums Standard Standard Standard Retarder 35	Drums Drums Standard Standard Standard Retarder 35	Discs Discs Standard Standard Standard Retarder 35
Michelin 385/65R22.5 Michelin 315/80R22.5 Aluminium	Michelin 385/65R22.5 Michelin 315/80R22.5 Aluminium	Not Specified 385/65R22.5 Not Specified 315/80R22.5 Steel	Not Specified 385/65R22.5 Not Specified 315/80R22.5 Steel	Not Specified 385/65R22.5 Not Specified 315/80R22.5 Steel	Not Specified 385/65R22.5 Not Specified 315/80R22.5 Steel	Not Specified 385/65R22.5 Not Specified 315/80R22.5 Steel	Michelin 385/65R22.5 Michelin 315/80R22.5 Aluminium



Photographs are for illustrative purposes only and are not necessarily South African models.



MAN SPECIFICATIONS

Model	TGM 18.240 4x2 BB K (C)	TGS 33.360 6x4 BB (M)	TGS 34.360 8x4 BB (M)
Axle layout	4X2	6X4	8X4 Twin Steer
Control	Forward	Forward	Forward
Application	Tipper	Tipper	Tipper
Mass (kg)			
Permissible body + payload	11 355	16 417	22 791
Tare - total (T) *	5 145	9 283	9 279
GVM	18 000	33 000	34 000
V	16 500	25 700	32 070
GCM	28 000	65 000	45 000
D/T	28 000	63 600	45 000
Axle - front GA/GAU	7 500	9 000	15 000
Axle - front A/AU	7 500	7 700	15 000
Axle - rear GA/GAU	11 500	26 000	21 000
Axle - rear A/AU	9 000	18 000	18 000
Major Dimensions (mm)			
Overall length	6 100	6 907	9 035
Overall width	2 240	2 490	2 472
Wheelbase	3 575	3 900	5 102
CA - cab to bogie/rear axle	3 260	3 495	5 595
Chassis Width Rear	864	864	0
Engine			
Make	MAN	MAN	MAN
Model	D0836 LFL40	D2066 LF07	D2066 LF48
Capacity (cm ³)	6 870	10 518	10 518
Layout	Diesel inline 6	Diesel inline 6	Diesel inline 6
Type	Turbo intercooled	Turbo intercooled	Turbo intercooled
Power at r/min (kW)	177.0 @ 2,400 - 2,400	265.0 @ 1,800 - 1,800	265.0 @ 1,400 - 1,900
Torque at r/min (Nm)	925.0 @ 1,200 - 1,800	1,800.0 @ 1,000 - 1,400	1,800.0 @ 1,000 - 1,400
Emissions standard	Euro 3	Euro 2	Euro 3
Transmission			
Model	9 S 1310 OD	12 28 OD TipMatic	12 28 OD TipMatic
Type	Synchromesh	Constant mesh	Constant mesh
Shift	Manual	Manual or Automatic	Manual or Automatic
No. of gears forward	9	12	12
First gear ratio	9,48	12,92	12,92
Top gear ratio	0,75	0,77	0,77
Brakes			
System type	Manual brakematic	Manual brakematic	Manual brakematic
Front	Discs	Drums	Discs
Rear	Discs	Drums	Discs
Anti-lock braking system (ABS)	Standard	Standard	Standard
Park/emergency system	Spring		
Exhaust brake	Standard	Standard	Standard
Engine brake		Standard	Standard
Retarder			
Tyres			
Make - front	Not Specified	Not Specified	Not Specified
Size and ply rating - front	315/80R22.5	385/65R22.5	385/65R22.5
Make - rear	Not Specified	Not Specified	Not Specified
Size and ply rating - rear	315/80R22.5	315/80R22.5	315/80R22.5
Rims	Steel	Steel	Aluminium




Photographs are for illustrative purposes only and are not necessarily South African models.



MAN SPECIFICATIONS

Model	HB2 18.240 BB FOCHR	HB3 18.360 LL FOCHR	HB4Solo / HB4Bustrain* 26.360 LL FOCNR	RR4 26.480 LL HOCNR	Volkswagen 17,210 OD
Axle layout	4X2	4X2	6X2	6X2	4x2
Control	Forward	Forward	Forward	Forward	Forward
Application	Commuter/City	Commuter/Intercity	Commuter/Intercity/ Bustrain*	Intercity / Coach	Commuter
Mass (kg)					
GVM	18 000	18 000	26 000	26 000	17 000
V	17 900	17 900	23 700 (33 900*)	23 700	16 700
GCM	19 500	19 500	33 000 (35 000*)	31 000	19 000
Axle - front GA/GAU	8 000	8 000	8 000	8 000	6 500
Axle - front A/AU	7 700	7 700	7 700	7 700	6 500
Axle - rear GA/GAU	11 000	11 500	11 500	18 460	11 000
Axle - rear A/AU	10 200	10 200	10 200	16 000	10 200
Major Dimensions (mm)					
Overall length (Body)	12 500	12 500	13 900 to 22 000	15 000	12 000 to 12 500
Overall width (Body)	2 600	2 600	2 600	2 600	2 600
Wheelbase	6 050	6 050	6050 +1350	7 000 to 8 000	5 950
Engine					
Make	MAN	MAN	MAN	MAN	MWM
Model	D0836 LOH41	D2066 LF48	D2066 LF48	D2676 EEV	6,10 TCA
Capacity (cm ³)	6 870	10 518	10 518	12 416	6 449
Layout	Diesel inline 6	Diesel inline 6	Diesel inline 6	Diesel inline 6	Diesel inline 6
Type	Turbo intercooled	Turbo intercooled	Turbo intercooled	Turbo intercooled	Turbo intercooled
Power at r/min (kW)	177 @ 2 400	265 @ 1,000 - 1,900	265 @ 1,000 - 1,900	353 @ 1,900	152 @ 2,600
Torque at r/min (Nm)	928 @ 1,200 - 1,800	1 800 @ 1,000 - 1,400	1 800 @ 1,000 - 1,400	2,300 @ 1,000 - 1,400	657 @ 1,700
Emissions standard	Euro 3	Euro 3	Euro 3	Euro 5 (EEV)	Euro 2
Transmission					
Make	Voith	ZF	ZF	ZF	Eaton
Model	DIWA 854.6	12 26 OD TipMatic	12 26 OD TipMatic	12 26 OD TipMatic	FS 5406A
Type	Remote Mount	Constant mesh	Constant mesh	Constant mesh	Synchronized
Shift	Automatic	Automated	Automated	Automated	Manual
No. of gears forward	4	12	12	12	6
Brakes					
System type	MAN brakematic	MAN brakematic	MAN brakematic	MAN brakematic	VW
Front	Discs	Discs	Discs	Discs	Drum
Rear	Drum	Discs	Discs	Discs	Drum
Anti-lock braking system (ABS)	Standard	Standard	Standard	Standard	Standard
Emergency systems	N/A			EBA/LGS/ACC/ESP	-
Exhaust brake	No	Standard	Standard	Standard	-
Engine brake	No	Standard	Standard	Standard	Standard
Retarder	Standard	Standard	Standard	Standard	-
Tyres					
Make - front	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified
Size and ply rating - front	315/80R22.5	315/80R22.5	315/80R22.5	315/80R22.5	295/80R22.5
Make - rear	Not Specified	Not Specified	Not Specified	Not Specified	Not Specified
Size and ply rating - rear	315/80R22.5	315/80R22.5	315/80R22.5	315/80R22.5	295/80R22.5
Rims	Steel	Steel	Steel	Steel	Steel

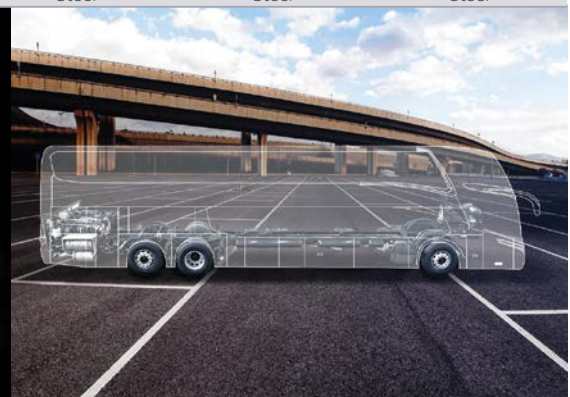

Photographs are for illustrative purposes only and are not necessarily South African models.